

ALU ADK 270

Outer Layer
518 - Aluminized IFR Fabric
270 g/m²


Moisture Barrier

4000 - Aramid nonwoven
laminated to a
PU membrane (90 g/m²)

Heat Barrier

5004 - Double layer Aramid felt
quilted to an Aramid/Viscose FR
inner lining (380 g/m²)

Heat Direction

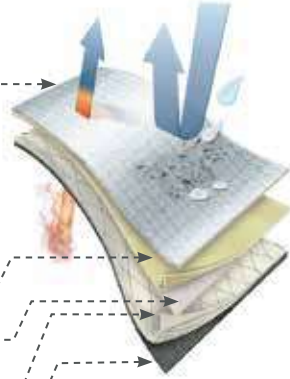

ALU ADK APC

Outer Layer
519 - Aluminized Glass Fabric
500 g/m²

Heat Barrier

5005 - Three layers of Aramid
felt (virgin) quilted to an
Aramid/Viscose FR
inner lining (500 g/m²)

Heat Direction

