
ALUMINIZED LAYER DETAILS

Heat Direction

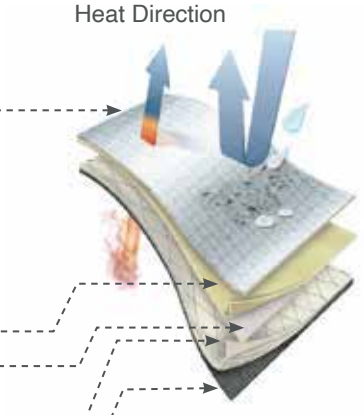


ALU ADK 270

Outer Layer
518 - Aluminized IFR Fabric
270 g/m²

Moisture Barrier
4000 - Aramid nonwoven laminated to a PU membrane (90 g/m²)

Heat Barrier
5004 - Double layer Aramid felt quilted to an Aramid/Viscose FR inner lining (380 g/m²)

Heat Direction

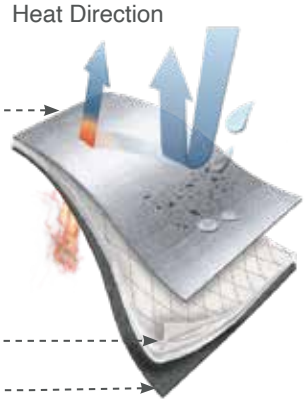

ALU ADK APC

Outer Layer
519 - Aluminized Glass Fabric
500 g/m²

Heat Barrier
5005 - Three layers of Aramid felt (virgin) guilted to an Aramid/Viscose FR inner lining (500 g/m²)