
FIRESTAR LAYER DETAILS 1/3

KIVANÇ Group

FIRESTOP

Heat Direction

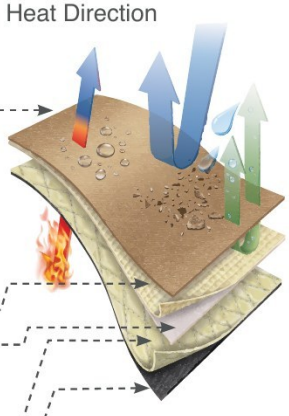

Outer Layer
390 - PBI® X55 Gold 205 g/m²
40% PBI®
59% Para - Aramid
1% Antistatic


Gold Brown

3D Moisture Barrier
4003 - Aramid 3D nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier
5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

MATRIX PLUS

Heat Direction

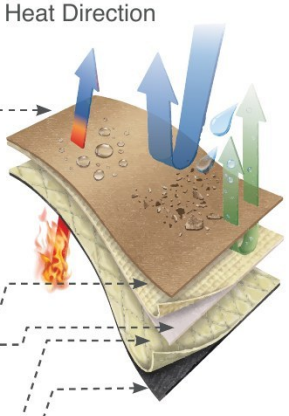

Outer Layer
388 - PBI® Matrix 200 g/m²
40% PBI®
58% Para - Aramid
2% Antistatic


Gold

Moisture Barrier
4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier
5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

PANO PLUS

Heat Direction

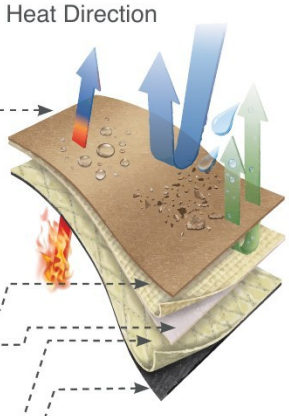

Outer Layer
387 - PBI® Gold 205 g/m²
40% PBI®
58% Para - Aramid
2% Antistatic


Gold

Moisture Barrier
4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (125 g/m²)

Heat Barrier
5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

ECO

Heat Direction

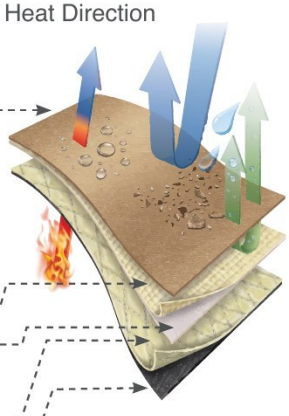

Outer Layer
386 - Fire Resist 195 g/m²
75% Meta - Aramid
23% Para - Aramid
2% Antistatic


Dark Blue Gold Red Yellow Black

Moisture Barrier
4000 - Aramid nonwoven laminated to a PU membrane (125 g/m²)

Heat Barrier
5003 - Aramid felt (virgin) quilted to an Aramid/Viscose FR inner lining (250 g/m²)

FREE

Heat Direction

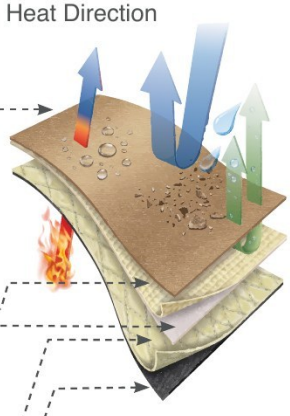

Outer Layer
386 - Fire-Resist 195 g/m²
75% Meta - Aramid
23% Para - Aramid
2% Antistatic


Dark Blue Gold Red Yellow Black

Moisture Barrier
4001 - Aramid nonwoven laminated to PU membrane (125 g/m²)

Heat Barrier
5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

FREE PLUS

Heat Direction

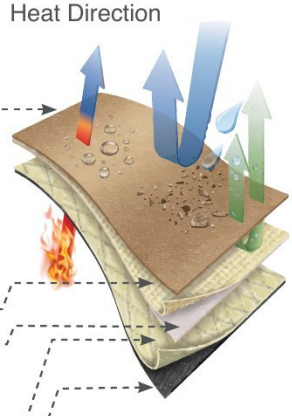

Outer Layer
386 - Fire-Resist 195 g/m²
75% Meta - Aramid
23% Para - Aramid
2% Antistatic

Dark Blue Gold Red Yellow Black


Moisture Barrier
4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (125 g/m²)

Heat Barrier
5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

FIRESTAR LAYER DETAILS 2/3

FREE PLUS RS

Heat Direction

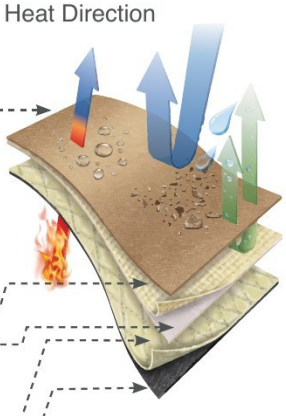

Outer Layer

392 - Fire-Resist Ripstop 195 g/m²

75% Meta - Aramid
23% Para - Aramid
2% Antistatic

Dark Blue · Gold · Red · Yellow · Black

Moisture Barrier


4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (125 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

FREE PLUS ULTRA LIGHT

Heat Direction

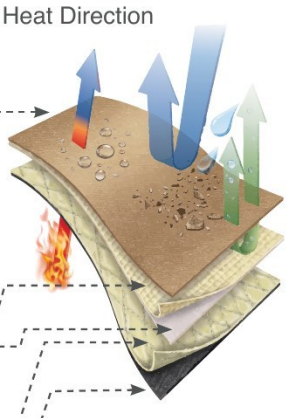

Outer Layer

386 - Fire-Resist 195 g/m²

75% Meta - Aramid
23% Para - Aramid
2% Antistatic

Gold · Red · Yellow

Moisture Barrier


4005 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (90 g/m²)

Heat Barrier

5008 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (175 g/m²)

NEPTUN PLUS

Heat Direction

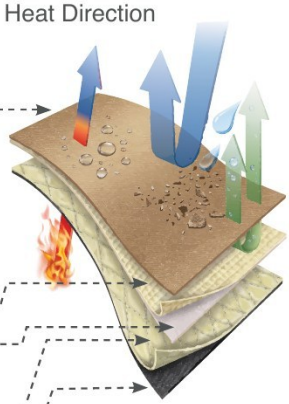

Outer Layer

444 -Poseidon 200 g/m²

79% Meta - Aramid
20% Para - Aramid
1% Antistatic

Dark Blue · Gold · Red

Moisture Barrier


4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

KAMA PLUS

Heat Direction

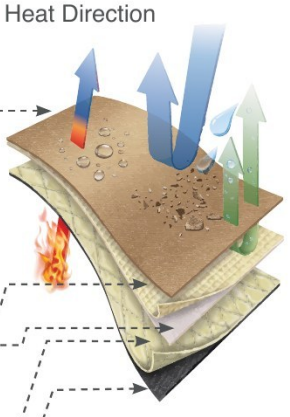

Outer Layer

507 - Kama 215 g/m²

40% Meta - Aramid
58% Para - Aramid
2% Antistatic

Dark Blue · Gold · Red

Moisture Barrier


4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (125 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

ARMOR PLUS

Heat Direction

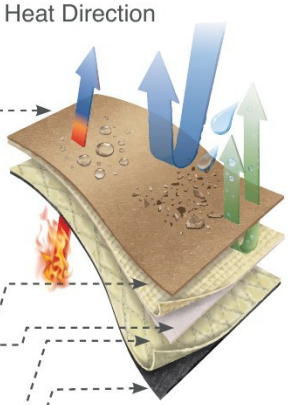

Outer Layer

511 - Armor 195 g/m²

38% Meta - Aramid
60% Para - Aramid
2% Antistatic

Brown · Gold

Moisture Barrier


4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (125 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

ARMOR STOP

Heat Direction

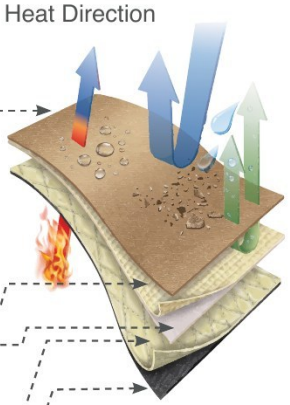

Outer Layer

511 - Armor 195 g/m²

38% Meta - Aramid
60% Para - Aramid
2% Antistatic

Brown · Gold

Moisture Barrier

4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (125 g/m²)


Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

FIRESTAR LAYER DETAILS 3/3

BOMBA

Heat Direction

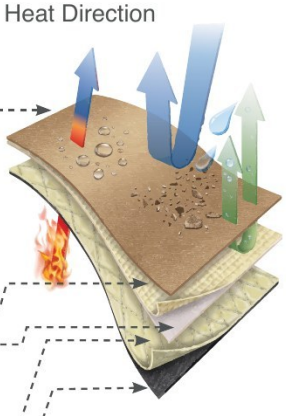

Outer Layer

392 - Fire-Resist Ripstop 195 g/m²

75% Meta - Aramid
23% Para - Aramid
2% Antistatic

Dark Blue | Red

Moisture Barrier


4003 - Aramid 3D nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

BOMBA DUO

Heat Direction

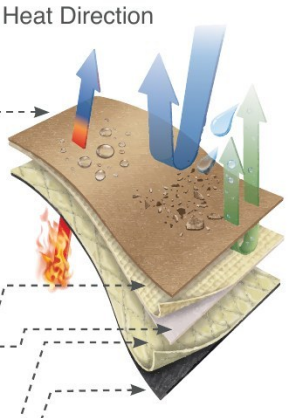

Outer Layer

392 - Fire-Resist Ripstop 195 g/m²

75% Meta - Aramid
23% Para - Aramid
2% Antistatic

Dark Blue | Red

Moisture Barrier


4003 - Aramid 3D nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier

5011 - Double layer aramid nonwoven quilted to an Aramid/ Viscose FR inner lining(260 g/m²)

FIRESAFE

Heat Direction

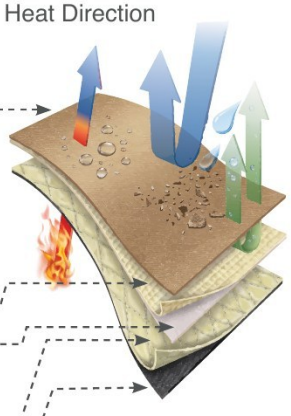

Outer Layer

525 - PBI Y55 205 g/m²

40% Meta - Aramid
59% Para - Aramid
1% Antistatic

Dark Blue | Gold

Moisture Barrier


4003 - Aramid 3D nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

PROLITE PLUS

Heat Direction

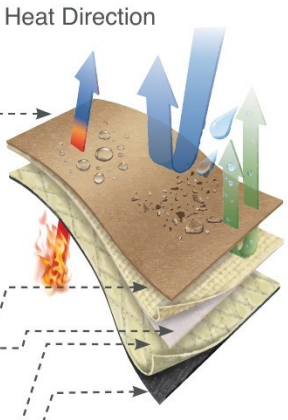

Outer Layer

572 - PBI Peak 5 180 g/m²

40% PBI
58% Para - Aramid
2% Antistatic

Gold | Gray

Moisture Barrier

4003 - Aramid 3D nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier

5010 - Aramid Spunlaced nonwoven quilted to slider inner lining (205 g/m²)